



(11) **EP 2 354 312 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
10.08.2011 Bulletin 2011/32

(51) Int Cl.:
E01F 7/02 (2006.01)

(21) Application number: **09824444.5**

(86) International application number:
PCT/ES2009/000504

(22) Date of filing: **20.10.2009**

(87) International publication number:
WO 2010/052350 (14.05.2010 Gazette 2010/19)

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **10.11.2008 ES 200803250**

(71) Applicant: **Malla Talud Cantabria, S.L.
39408 Barros (ES)**

(72) Inventors:
• **CASTRO FRESNO, Daniel
E-39005 Santander (Cantabria) (ES)**

- **RODRÍGUEZ HERNÁNDEZ, Jorge
E-39005 Santander (Cantabria) (ES)**
- **SAÑUDO FONTANEDA, Luis Ángel
E-39005 Santander (Cantabria) (ES)**
- **DEL COZ DÍAZ, Juan José
E-33204 Gijón (Asturias) (ES)**
- **ÁLVAREZ RABANAL, Felipe Pedro
E-33204 Gijón (Asturias) (ES)**
- **GARCÍA NIETO, Paulino José
E-33204 Gijón (Asturias) (ES)**

(74) Representative: **Molina Garcia, Julia
Moratin, 11
46002 Valencia (ES)**

(54) **PROTECTIVE BARRIER FOR SNOWSTORMS**

(57) Protective barrier for winds carrying snow and sand, for installation near communication routes in order to prevent the accumulation of snow or sand on the road. The barrier is formed by joining several screens made of a set of blades that are arranged horizontally, superposed on one another at regular distances, joined with vertical posts by anchoring their ends to several rectangular plates that are inserted in the vertical post using a ring on the plate.

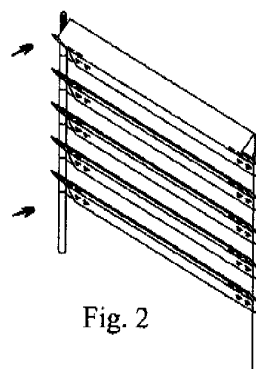


Fig. 2

Description

Purpose of the invention

[0001] As stated in the declaration of this descriptive report, the present invention refers to a barrier intended to protect transportation routes, such as train track, roads and highways from accumulations of snow or sand carried by winds, by preventing the wind from directly lashing the route, thereby depositing and accumulating the storm's materials outside the transportation route.

Background

[0002] Different methods are known for protecting routes from winds carrying snow or sand. The most traditional methods are wooden barriers with panels arranged horizontally equidistant from each other, attached to vertical posts to form a barrier.

[0003] Other barriers incorporate metallic posts positioned vertically into the ground together with plastic or synthetic materials as its horizontal elements. There are also mixed barriers built with wooden boards and steel posts. US patent no. 353.206 claims for the ornamental design of a fibreglass snow fence; this barrier is inclined leeward with additional supports on this side.

[0004] US patent no. 3.966.172 presents a protective device on the windward and leeward sides, consisting of two A-frame barriers, and composed of a number of horizontal boards or strips with vertical posts, anchored to the ground with cables.

[0005] Plant protection from winds carrying snow or sand is also used, achieved by planting trees, bushes or plants arranged in one or more lines forming a barrier. The disadvantage of this system is that the vegetation is useful when it reaches a certain height, and not when it is taller or shorter.

Description of the invention

[0006] The proposed invention consists of a protective barrier against winds carrying snow or sand composed of a set of easily transportable parts to the site in order to form a barrier by arranging a number of screens in a line. The structure of the invention's elements facilitates a quick and simple on-site installation and replacement of worn parts during repair and maintenance work.

[0007] Each screen consists of a group of strips to be positioned horizontally, superimposed at regular distances, bound to the vertical posts by fastening their ends to rectangular fastening plates that are inserted into the vertical post using a tubular ring found in the plate's structure.

[0008] The line of screens that forms the barrier will force the wind to pass through its structure, dissipating its velocity and avoiding eddies in the protected zone, eddies that cause accidents since they impede the drivers' view of the roadway.

[0009] The screen will have a wind deflector in its upper part that will favor the channelling of the wind's trajectory causing the precipitation of the materials carried by the wind to occur once the protected zone has been passed.

[0010] In this manner, the installation of the invention on the ground will eliminate the depositing of snow or sand on the route, causing the accumulation of these materials onto first, the zone previous to the barrier, windward, and second, outside of the route, in the leeward part.

[0011] The lower part of the screen will not have strips, to minimise the snow deposits in the area immediately after the screen, in the leeward zone.

[0012] In addition, the screen may have a joint in its lower part that allows the screens to face one side or the other, or toward both sides, so as to lower it completely over the surface in seasons when this protection is not needed and it is desirable to eliminate the visual impact that these barriers have on the landscape; moreover, the joints will facilitate repair work.

Brief description of the illustrations

[0013] In order to complement the present description, and to aid in the better understanding of the invention's characteristics, the present descriptive report of the drawings is included, which demonstrates the preferred construction method. These illustrations, which are not all encompassing, illustrate the following:

Figure 1.- View of the protective barrier for winds carrying snow or sand created by the joining of various screens, illustrating the placement method with respect to the wind.

Figure 2.- An individual screen from a windward perspective, the side that is lashed by the wind.

Figure 3.- An individual screen, leeward view.

Figure 4.- View of a strip.

Figure 5.- Profile view of a strip.

Figure 6.- The fastening plate from a windward view.

Figure 7.- The fastening plate from a leeward view.

Figure 8.- Detail of the union of the strips with the fastening plate, windward view.

Figure 9.- View of the upper strip with the deflector in its windward position; the union to the fastening plates is visible.

Figure 10.- The detail of the union of the upper strip to the fastening plates.

Figure 11.- Detail of the end of the screen, with the vertical post's threaded bar and the union of the strips to the fastening plate, leeward view.

Figure 12.- Profile view of the screen.

Figure 13.- Complete illustration of the vertical element's joint.

Figure 14.- View of the joint's lower bar.

Figure 15.- The joint's upper bar.

Figure 16.- The part that allows screwing the bars into the joint.

Figure 17.- The joint's upper bar's protective part.

Preferred construction of the invention

[0014] With reference to the figures shown, we see how the barrier, the invention, Figure 1, is composed of the union of various screens that are positioned into the ground using vertical posts. Each screen is composed of a number of strips (1), arranged in a rectangular configuration, positioned horizontally, one on top of the other and with some overlapping among them, in order to form the screen by fastening its ends to each vertical posts that are positioned into the ground (Figures 2 and 3).

[0015] The strip's profile displays a longitudinal fold in its central portion with two identical segments (2, 3) of 191.77 mm, forming a 170° angle; this arrangement is advantageous in that it endows the invention with wind resistance. The screen will be arranged on site with all strips in the same position, with its concave portion windward; the side of the barrier that receives the wind is represented by the arrows (Figure 1 and 2).

[0016] All strips have a fold (4) on the edges of its larger sides that will protect the edges of the strip from oxidation, and also protect the workmen from cuts during installation or repair work.

[0017] The strips are attached to the posts with a rectangular plate (5) slightly shorter than the strip and folded into two segments (9, 10) with the same angle of inclination as the strips in the screen. This plate is inserted into the post using a tubular ring (6) that holds each plate welded in its middle area, with a cross-section that fits into the vertical post, with a ring height of 110.00 mm.

[0018] The plate (5) features four slanted horizontal perforations (7) on each side, in order to secure the strips, which likewise present four perforations (8) in each of their ends related in position and size with the perforations (7) of the plate. This attachment of the plate and the strip can be seen in Figures 8, 9 and 10.

[0019] The ends of the strips in contiguous screens will be attached to each side of the plate, in order to form a protective barrier in this form of union: the details are shown in Figure 11.

[0020] In Figure 1, we do not full see the fastening plates in the ends of the barriers, but rather only up to the ring (6) which is anchored into the vertical post. This is because these end fastening plates are placed for aesthetic reasons and for the safety of the passers-by who circulate through the zone, eliminating the projection that this plate would constitute without receiving any strip.

[0021] Likewise, in Figures 1 and 2, an individual screen is shown, displaying the fastening plate (5) for the end of the barrier; it must be understood that in each screen, excepting at the ends of the barrier, the whole fastening plate (5) will be installed, which will allow for the anchoring of the following screen's strips.

[0022] The final strip (1) of each screen will have an additional segment (11), folded and inclined leeward at a 90° angle, which will serve as a wind deflector. This

deflector segment will be lower than those of the strip, 150.00 mm.

[0023] The strips (1) will be installed on the screen equidistant from each other on the vertical posts, maintaining this distance by the concurrence of separator pipes (12) that are inserted into the posts between the tubular rings (6) in the strips, and the height of the pipes will determine the degree of overlapping among them: the less height the greater degree of overlapping amongst strips; in this manner the preferred construction will have a height of 177.34 mm.

[0024] The position of the fastening plate (5) with respect to the tubular ring (6) will determine the degree of inclination of the strips (1) in the screen. They will be manufactured, preferably, so that the segment of the strips positioned leeward will form a 65° angle with respect to the horizontal plane (Figure 12).

[0025] The internal structure of the vertical posts that support the screen will be a threaded bars (13) driven into the ground. Preferably a Gewi® bar 2000.00 mm in height.

[0026] The lower part of the screen will not have strips; they will be replaced by inserting pipes (14) into the vertical posts with the height desired for this space. The optimal size for this space from the surface to the beginning of the screen is 10-15% of the screen's whole height.

[0027] The cross-section of these lower pipes (14) of the screen will be the same as that of the separator pipes (12) between the strips (1), and as that of the tubular ring in the strip's fastening plates (6).

[0028] The screen will be closed in its upper part using a nut (15) that screws into the bar that forms the vertical post.

[0029] The screen may have a joint in the post's lower area that permits it to be folded over the surface. In this case, each vertical element will be formed by two bars with a threaded structure (16, 17), Gewi®, connected to each other with a joint (Figure 13).

[0030] The lower bar (16) will be inserted into the ground, and the upper bar (17) will form the screen; the union will be joined by screwing the bars into nuts (18) welded into the inside of cylindrical pieces (19, 20), as is shown in Figure 16, which have fastening elements at their other end to form the joint, one (21) will extend from the lower cylinder (19), to fit into the middle of the two receiving elements (22) that contain the end of the cylinder (20) of the upper joint. The lower fastening element (21) and its receptor elements (22) have perforations for position (23, 24), intended to receive, once the lower fastening element (21) has been inserted in the receiving elements (22), a through piece, preferably a bolt, fastening the joint with a nut (25). The upper part of the joint will be additionally protected by a hyperbolic tubular element (26) inserted into the bar above the cylindrical part (20) that will serve for the change in sizes between this and the bar in the joint. The lower part of the joint will may also be protected by a pipe (27) which will have a welded nut.

[0031] The screens will be anchored to the ground using cables that will be positioned in the upper part of the posts in order to be anchored to the ground both windward and leeward (Figure 1). Another alternative will be the placement of rigid pipes in the same position as the cables, but located only on one side of the barrier. This will be the preferred construction when the posts have a lower joint.

[0032] The barrier will be installed, preferably, parallel to the route to be protected, on the tops of hills, in windward areas of stream banks and other topographical depressions that allow the increase of snow deposits on the screens; a study must first be made of the predominant winds in the zone in a sufficient time period to obtain a suitable statistical value of the wind directions and which one or more are predominant over the rest.




[0033] The accumulation of sand or snow will be in the windward or leeward zone, outside of the zone protected by the invention.


[0034] The barrier will be arranged without openings in the line of protection; in cases where the arrangement with openings is inevitable, some screens must overlap with others along the same line, otherwise various lines of screen will be arranged.


[0035] It must be understood that the invention has been described in accordance to its preferred construction, and that hence it may be subject to alterations in form, size and materials, whenever said alterations do not substantially change the features of the invention that are claimed below.






Claims

1. Protective barrier for winds carrying snow or sand, formed by arranging in a line various screens composed of a number of strips (1) arranged horizontally and affixed to vertical posts, **characterized by** the fact that each end of the strip (1) is connected to the vertical posts with a plate (5) that contains a tubular ring (6) in its middle area to be inserted into the post, and that the plate has perforations (7) in its ends to fasten the strips of contiguous screens.
2. Protective barrier for winds carrying snow or sand, according to claim 1, **characterized by** the fact that the strips are rectangular, folded into two equal segments (2, 3), with perforations (8) in its ends arranged in position and related in structure of the perforations of the plate (5).
3. Protective barrier for winds carrying snow or sand, according to the previous claims, **characterized by** the fact that the plate will be formed by two equal segments (9, 10) with an angle of inclination that coincides with that of the strip, such that the concave part is positioned in the vertical post windward, in order to receive the strips in this position.
4. Protective barrier for winds carrying snow or sand, according to claim 1, **characterized by** the fact that the structure of the final strip of the upper part of each screen is composed of an additional segment (11) to the rest of the strips that folds inclining leeward.
5. Protective barrier for winds carrying snow or sand, according to claim 1, **characterized by** the fact that separator pipes (12) will be inserted into the vertical posts between the tubular rings (6).
6. Protective barrier for winds carrying snow or sand, according to claim 1, **characterized by** the fact that the lower part of the screen can be free of strips, which will instead be replaced by pipes (14) arranged in the lower part of the vertical posts.
7. Protective barrier for winds carrying snow or sand, according to the previous claims, **characterized by** the fact that the internal structure of the vertical posts will be a threaded bar (13) into which the lower pipe (14), the tubular rings (6) of the plate and the separator pipes (12) will be inserted; the screen will be closed using a nut (15) in the upper part of the bar.
8. Protective barrier for winds carrying snow or sand, according to claim 1, **characterized by** the fact that the screen can be collapsed, allowing for its folding, since each vertical element is composed of two bars (16, 17), a lower one (16) that is inserted into the ground, and an upper one (17) where the structure of the screen is placed, with both of these bars being joined by a joint.
9. Protective barrier for winds carrying snow or sand, according to claim 8, **characterized by** the fact that the upper end of the bar that is inserted into the ground, and the lower end of the bar that forms the screen are screwed with nuts (18) that are welded in the inside of cylinders (19, 20) that contain in their other end fastening elements that form a joint; a fastening element (21) that protrudes from the lower cylinder (19), to fit into the middle of two receptor elements (22) that holds the end of the cylinder (20) of the upper joint, with the corresponding perforations in the lower fastening element and in the receptors (23, 24) for placing a through part that allows for the joint function.
10. Protective barrier for winds carrying snow or sand, in accordance with claims 8 and 9, **characterized by** the fact that the upper part of the joint may be additionally protected by a tubular element (26) inserted into the upper bar (17) above the cylinder (20), and the lower part of the joint may have a protection consisting of a pipe (27) within which there is a welded nut that will be screwed into the lower bar (16).

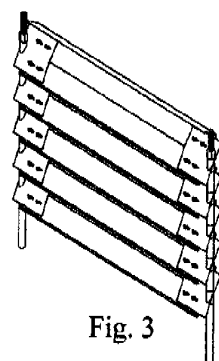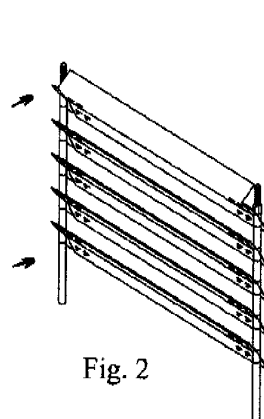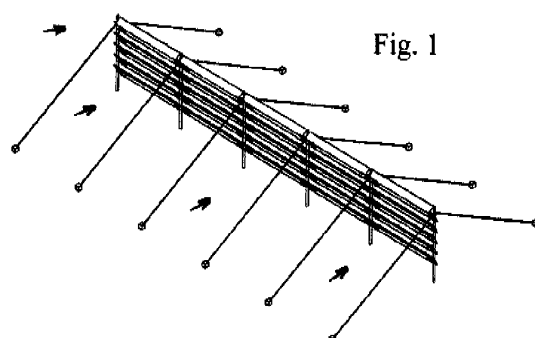

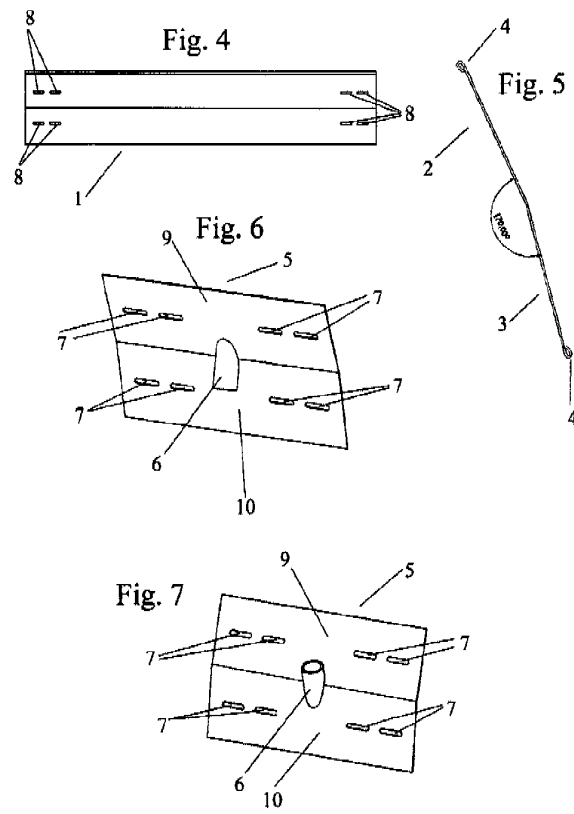

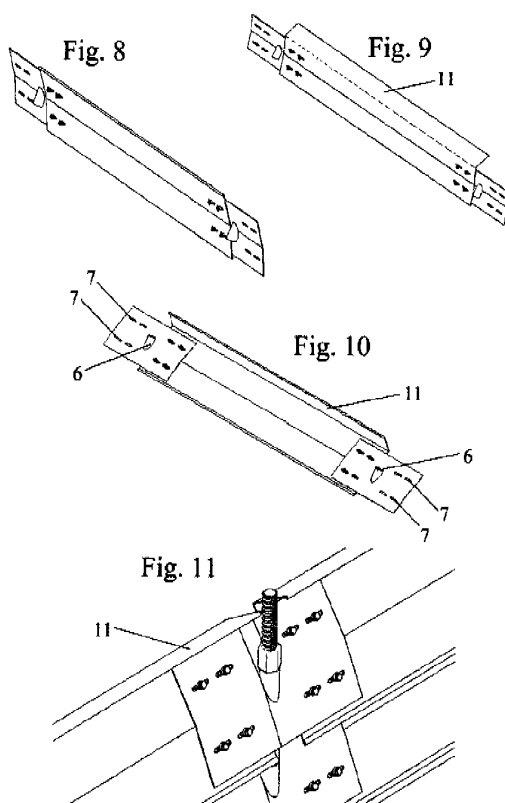

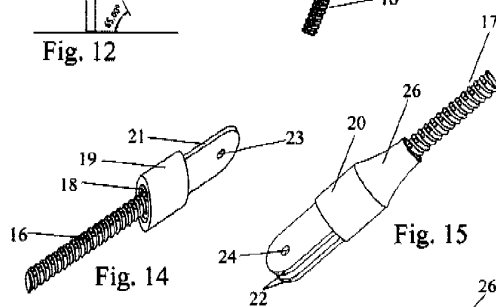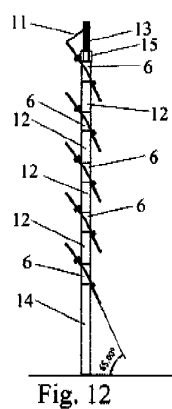

INTERNATIONAL SEARCH REPORT

International application No.

PCT/ES 2009/000504

A. CLASSIFICATION OF SUBJECT MATTER

E01F 7/02 (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

INVENES, EPODOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2267722 A (VERGO MARMIE SYDNEY) 15.12.1993, pages 1-2; figures.	1,5,6,8
A		2-4,7,9,10
Y	US 4498660 A (BREMA et al.) 12.02.1985, column 1, line 30 - column 4, line 60; figures.	1,5,6,8
A		2-4,7,9,10
A	US 4339114 A (DEIKE et al.) 13.07.1982, figures & Abstract from DataBase of WPI. Recuperado de EPOQUE; Número of acceso:1982-K1398E.	1-10
A	GB 2311201 A (LYONS CHARLES STEPHEN) 24.09.1997, figures & Abstract from DataBase of WPI. Retrieved from EPOQUE; Número of acceso:1997-437981.	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance.

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition, or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

16.February.2010 (16.02.2010)

Date of mailing of the international search report

(18/02/2010)

Name and mailing address of the ISA/
O.E.P.M.

Paseo de la Castellana, 75 28071 Madrid, España.

Facsimile No. 34 91 3495304

Authorized officer

B. Castañón Chicharro

Telephone No. +34 91 349 32 61

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/ ES 2009/000504

Patent document cited in the search report	Publication date	Patent family member(s)	Publication date
GB 2267722 A B	15.12.1993	NONE	-----
US 4498660 A	12.02.1985	CA 1178096 A	20.11.1984
US 4339114 A	13.07.1982	NONE	-----
GB 2311201 A	24.09.1997	NONE	-----

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 353206 A [0003]
- US 3966172 A [0004]